


## CTMC1008F Series

From 0.01  $\mu\text{H}$  to 100  $\mu\text{H}$

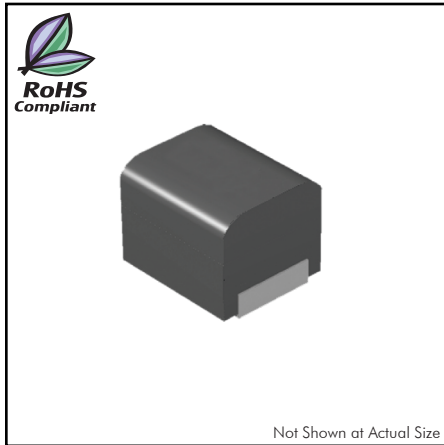

### CHARACTERISTICS

**Description:** Ferrite core, wire-wound molded chip inductor.

**Applications:** TVs, VCRs, disk drives, computer peripherals, telecommunication devices and electronic control boards for automobiles.

**Operating Temperature:** -45°C to +85°C

**Storage Temperature:** -55°C to +105°C

**Inductance Tolerance:**  $\pm 5\%$ ,  $\pm 10\%$  &  $\pm 20\%$

**Testing:** Inductance and Q are tested on a HP4285A or a HP4286A at a specified frequency.

**Packaging:** Tape & Reel.

**Miscellaneous:** RoHS Compliant.

**Additional Information:** Additional electrical & physical information available upon request.

**Samples available. See website for ordering information.**

### SPECIFICATIONS

Please specify tolerance code when ordering.

CTMC1008F-R010\_ ← J =  $\pm 5\%$ , K =  $\pm 10\%$ , M =  $\pm 20\%$

Part Number	Inductance ( $\mu\text{H}$ )	L Test Freq. (MHz)	Q Fact. Min.	Q Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. ( $\Omega$ )	Rated DC (mA)
CTMC1008F-R010_	.010	100	15	100	2150	.26	530
CTMC1008F-R012_	.012	100	15	100	2050	.27	500
CTMC1008F-R015_	.015	100	15	100	1850	.29	480
CTMC1008F-R018_	.018	100	15	100	1650	.31	450
CTMC1008F-R022_	.022	100	15	100	1550	.37	420
CTMC1008F-R027_	.027	100	15	100	1400	.40	410
CTMC1008F-R033_	.033	100	20	100	1250	.42	400
CTMC1008F-R039_	.039	100	20	100	1100	.45	380
CTMC1008F-R047_	.047	100	20	100	1050	.50	360
CTMC1008F-R056_	.056	100	20	100	950	.60	340
CTMC1008F-R068_	.068	100	20	100	900	.65	320
CTMC1008F-R082_	.082	100	20	100	850	.75	300
CTMC1008F-R10_	.10	100	20	100	750	.80	280
CTMC1008F-R12_	.12	25.2	30	25.2	700	.30	550
CTMC1008F-R15_	.15	25.2	30	25.2	550	.35	500
CTMC1008F-R18_	.18	25.2	30	25.2	500	.40	460
CTMC1008F-R22_	.22	25.2	30	25.2	450	.50	430
CTMC1008F-R27_	.27	25.2	30	25.2	425	.55	420
CTMC1008F-R33_	.33	25.2	30	25.2	400	.60	400
CTMC1008F-R39_	.39	25.2	30	25.2	375	.65	375
CTMC1008F-R47_	.47	25.2	30	25.2	350	.68	350
CTMC1008F-R56_	.56	25.2	30	25.2	325	.75	325
CTMC1008F-R68_	.68	25.2	30	25.2	300	.85	300
CTMC1008F-R82_	.82	25.2	30	25.2	260	1.00	260
CTMC1008F-1R0_	1.0	7.96	30	7.96	245	1.10	245
CTMC1008F-1R2_	1.2	7.96	30	7.96	230	1.20	230
CTMC1008F-1R5_	1.5	7.96	30	7.96	182	1.30	220
CTMC1008F-1R8_	1.8	7.96	30	7.96	135	1.45	210
CTMC1008F-2R2_	2.2	7.96	30	7.96	105	1.55	200
CTMC1008F-2R7_	2.7	7.96	30	7.96	70	1.70	195
CTMC1008F-3R3_	3.3	7.96	30	7.96	55	1.90	185
CTMC1008F-3R9_	3.9	7.96	30	7.96	48	2.10	180
CTMC1008F-4R7_	4.7	7.96	30	7.96	43	2.30	175
CTMC1008F-5R6_	5.6	7.96	25	7.96	42	2.50	170
CTMC1008F-6R8_	6.8	7.96	25	7.96	39	2.70	165
CTMC1008F-8R2_	8.2	7.96	25	7.96	36	3.05	160
CTMC1008F-100_	10	2.52	25	2.52	33	3.50	155
CTMC1008F-120_	12	2.52	25	2.52	30	3.80	150
CTMC1008F-150_	15	2.52	25	2.52	26	4.40	140
CTMC1008F-180_	18	2.52	25	2.52	24	4.80	130
CTMC1008F-220_	22	2.52	25	2.52	22	5.50	125
CTMC1008F-270_	27	2.52	25	2.52	21	6.30	115
CTMC1008F-330_	33	2.52	25	2.52	20	7.10	110
CTMC1008F-390_	39	2.52	20	2.52	18	9.50	90
CTMC1008F-470_	47	2.52	20	2.52	17	11.10	80
CTMC1008F-560_	56	2.52	20	2.52	16	12.10	75
CTMC1008F-680_	68	2.52	20	2.52	15	16.60	70
CTMC1008F-820_	82	2.52	20	2.52	13	19.00	66
CTMC1008F-101_	100	.796	15	.796	12	21.00	60

### PHYSICAL DIMENSIONS

Size	A	B	C	D	E
mm	2.5 $\pm$ 0.2	2.0 $\pm$ 0.2	1.8 $\pm$ 0.2	1.4 $\pm$ 0.1	0.4
inches	0.10 $\pm$ 0.008	0.08 $\pm$ 0.008	0.07 $\pm$ 0.008	0.06 $\pm$ 0.004	0.02

