

CTIHLP1805F Series

From 0.22 μ H to 4.7 μ H



CHARACTERISTICS

- Description:** SMD (shielded) power inductor.
- Applications:** PDA, Notebook, Desktop, Server applications, Low profile, high current power supplies, battery powered devices, DC/DC converter for Field Programmable Gate Array (FPGA).
- Operating Temperature:** -55°C to +125°C (including self - temperature rise)
- Inductance Tolerance:** $\pm 20\%$
- Testing:** Inductance is tested on an HP4285A at 100KHz, 0.5V
- Packaging:** Tape & Reel.
- Marking:** Parts are marked with inductance code.
- Miscellaneous:** **RoHS Compliant.**
- Additional Information:** Additional electrical & physical information available upon request.
- Samples available. See website for ordering information.**


SPECIFICATIONS

*I_{rms}: DC current (A) that will cause an approximate ΔT of 40°C.
 **I_{sat}: DC current (A) that will cause L0 to drop approximately 30%.

Part Number	Inductance (μ H)	L Test Freq. (KHz)	DCR Max. (m Ω)	*I _{rms} Typ. (A)	**I _{sat} Typ. (A)
CTIHLP1805F-R22M	0.22	100	12	8.5	11.5
CTIHLP1805F-R47M	0.47	100	25	5.0	7.0
CTIHLP1805F-R68M	0.68	100	36	4.5	6.0
CTIHLP1805F-1R0M	1.0	100	47	4.2	5.2
CTIHLP1805F-2R2M	2.2	100	83.5	2.75	3.5
CTIHLP1805F-4R7M	4.7	100	195	1.8	2.8

PHYSICAL DIMENSIONS

Size	A	B	C Max.	D	E
mm	4.1 \pm 0.2	4.6 \pm 0.2	1.2	1.5 \pm 0.3	1.0 \pm 0.5
inches	0.16 \pm 0.008	0.18 \pm 0.008	0.05	0.06 \pm 0.012	0.04 \pm 0.020

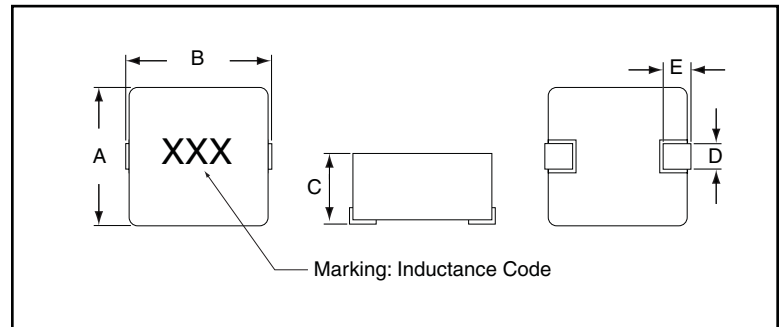

PAD LAYOUT

